



## SCHEDULE 40 PVC



Reducer Bushing				
437-490	5 x 4	3 1/4	1 1/4	3
437-528	6 x 2	4	2 11/16	3 1/2
437-529*	6 x 2½	4 7/16	2 7/16	3 1/2
437-530	6 x 3	4 1/16	2 1/16	3 1/2
437-532	6 x 4	4	2	3 1/2
437-534	6 x 5	3 13/16	13/16	3 1/2
437-582	8 x 4	5 1/4	3 1/4	4 1/2
437-585	8 x 6	5 1/4	1 3/4	4 1/2
437-623	10 x 3	6 3/8	4 3/8	5 1/16
437-624	10 x 4	6 3/8	4 1/3	5 1/16
437-626	10 x 6	5 7/16	2 7/16	5 1/16
437-628	10 x 8	5 7/16	1 3/8	5 1/16
437-661	12 x 3	7 3/8	5 3/8	6 1/16
437-664	12 x 4	7 5/8	5 5/8	6 1/16
437-666	12 x 6	7 11/16	4 1/8	6 1/16
437-668	12 x 8	6 7/16	2 3/8	6 1/16
437-670	12 x 10	6 1/2	1 7/16	6 1/16

Outside diameter taken across hex flats



Reducer Bushing				
Part No	Size (in)	L	N	SPG
438-072	½ x ¼	1 3/16	1/2	7/8
438-292	2½ x 2	2 5/16	13/16	2
438-339	3 x 2½	2 3/8	7/8	2
438-420	4 x 2	2 7/16	1 7/16	2
438-421	4 x 2½	2 7/16	1 1/8	2 1/16


CUSTOMER SERVICE  
Phone: (800) 776-2756 | Fax: (731) 772-0835  
Email: customerservice@lascofittings.com  
www.lascofittings.com

## LIMITED WARRANTY

LASCO Fittings, Inc. products are warranted to be free from manufacturing defects in materials and workmanship. They are warranted against rot, rust, and electrolytic corrosion for a period of three years from date of installation. If LASCO products prove defective due to manufacturing defects in material or workmanship during that period, the manufacturer will provide new replacement units of the same type and size. No remedy will be granted under this warranty if LASCO products are not used strictly in accordance with LASCO's directions with respect to use and storage or if the products have been modified in any way.

THE MANUFACTURER'S LIABILITY UNDER EXPRESSED OR IMPLIED WARRANTY OR FOR ANY REASON IS LIMITED TO FURNISHING REPLACEMENT UNITS OR GRANTING A CREDIT FOR DEFECTIVE UNITS. NO LABOR EXPENSE OR CONSEQUENTIAL DAMAGES WILL BE PAID BY LASCO. THIS WARRANTY IS IN LIEU OF ALL OTHER GUARANTEES AND WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PURPOSE, EXCEPT FOR ANY WARRANTIES IMPLIED BY LAW FOR NONCOMMERCIAL CONSUMERS. ANY SUCH WARRANTIES ARE LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY.

DO NOT USE LASCO FITTINGS FOR COMPRESSED AIR OR GASES.  
DO NOT TEST PVC PIPING SYSTEMS WITH COMPRESSED AIR OR GASES.  
DO NOT USE FITTINGS WITH LIQUIDS NOT RECOMMENDED BY LASCO.  
MODIFICATIONS OF FITTINGS VOIDS THE WARRANTY.

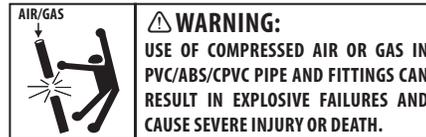

## STANDARDS AND SPECIFICATIONS

- ASTM D-1784 – Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly Vinyl Chloride) (CPVC) Compounds.
- ASTM D-2466 – Socket Type Poly (Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40.
- ASTM F-1970 – Standard Specification for Special Engineered Fittings, Appurtenances or Valves for use in Poly (Vinyl Chloride) (PVC) or Chlorinated Poly (Vinyl Chloride) (CPVC) Systems.
- MATERIAL – LASCO Schedule 40 Fittings are produced from PVC Type 1, Cell Classification 12454-B.  
– O-rings are produced from a Buna-N (Nitrile) material.
- LISTINGS – NSF/ANSI Standard 61, Annex G: Drinking Water System Components  
Weighted average lead content of  $\leq 0.25\%$  and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953) NSF/ANSI Standard 14: Plastics Piping system Components and Related Materials.  
Includes /ANSI Standard 61, Annex G

**LASCO**<sup>®</sup>  
*Fittings, Inc.*

SCH40-DC-02