


Single Door Wafer Check Valve (DH74X)



DH74X

- Connection Ends: ASME B16.1 CL 125, ASME B16.5 CL 150
- Working Pressure: 300PSI
200PSI and 250PSI available upon request
- Temperature Range: 0°C- 100°C
- Coating: Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

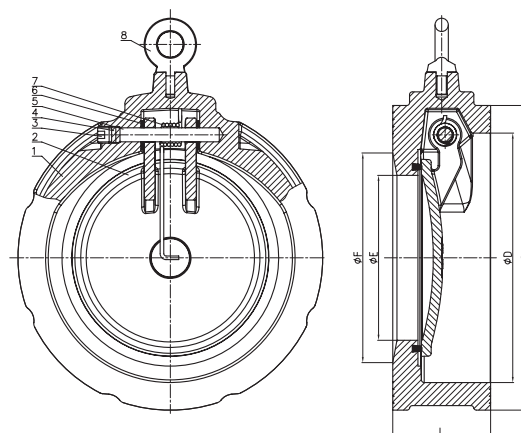

MATERIAL SPECIFICATION

Part No.	Part	Standard Specification	Options
1	Body	ASTM A536, 65-45-12	
2	Disc	AISI 304	AISI 316, AL-Bronze UNC 95400
3	Screw	Carbon Steel	AISI 304, AISI 316
4	Gasket	EPDM	NBR
5	Stem	AISI 420	AISI 304, AISI 316, AISI 416
6	Gasket	PTFE	
7	Spring	AISI 304	AISI 316
8	Lifting Hook	Carbon Steel Zinc Plated	

Note: For special material request other than standard specification, please indicate clearly on the inquiry or order list.

DN		Dimensions(mm)				
Inch	mm	L	D	E	F	D1
2"	50	44.5	64	33	60	107
2.5"	65	48.0	79	42.9	73	127
3"	80	51.0	94	52.4	83.5	142
4"	100	57.0	118	76	106	162
5"	125	63.5	147	95	128	192
6"	150	70.0	178.5	118	150	218
8"	200	73.0	235	163.5	200	273
10"	250	79.0	281	194	238	329
12"	300	86.0	335	241.5	287	384